

Braukmann

RV277

Controllable anti-pollution check valve EA type

Add-on for pressure reducing valves and filters

Application

Check valves of this type are particularly suitable for integral use with pressure reducing valves, filters and filter combinations of all types.

Check valves are safety devices for independent prevention of water backflow, for example from drinking water appliances back into the central water supply system.

They can also be used for industrial, commercial and similar systems where back pressure, backflow and back syphonage must be prevented.


The classifications of appliances to meet these requirements are specified in EN 1717.

Approvals

- DVGW

Special Features


- LEAD-FREE: Pb content of all materials in contact with medium less than 0.1 %
- Universal application
- Easy installation
- Quiet operation
- Creates no shock pressure loadings
- Suitable for installation in any position
- Low pressure loss
- All materials are UBA conform
- 5-year warranty

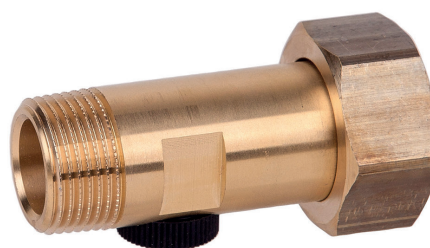

Technical Data

Medium	
Medium:	Drinking water
Connections/Sizes	
Connection size:	Male threaded union 1/2" - 2" Female threaded union 1" - 2 1/2"
Pressure values	
Opening pressure:	approx. 0.01 bar
Max. inlet pressure:	25 bar
Operating temperatures	
Max. operating temperature medium:	65 °C accord. DIN EN 13959 (short term operation up to 90 °C)
Specifications	
Liquid category:	2 (no hazardous materials)

Construction

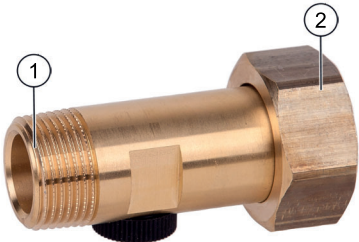Overview		Components	Materials
	1	Male threaded union with flat wrench faces	Lead-free brass
	2	Union nut with internal thread	Brass
	Not depicted components:		
		Check valve insert	High-grade synthetic material check valve cartridge
		Test plug with seal ring	EPDM seal ring, high-quality synthetic material test plug

Method of Operation

Spring loaded check valves have a moving seal disc which is lifted off the seat by a greater or lesser amount depending on the flow rate through the valve. If the flow falls towards zero, then the spring pushes the disc back onto the seat and seals the waterway.

To ensure continuing correct function it is recommended that check valves be regularly checked and maintained (as specified in EN 1717).

Transportation and Storage

Keep parts in their original packaging and unpack them shortly before use.

The following parameters apply during transportation and storage:

Parameter	Value
Environment:	clean, dry and dust free
Min. ambient temperature:	5 °C
Max. ambient temperature:	55 °C
Min. ambient relative humidity:	25 % *
Max. ambient relative humidity:	85 % *


*non condensing

Installation Guidelines

Setup requirements

- Install in horizontal pipework with test and drain plug downwards
 - This position is best for draining
- Install shut-off valves
 - Shut-off valves provide optimal serviceability
- Ensure good access (consider EN1717 requirements)
 - Simplifies maintenance and inspection

Installation Example

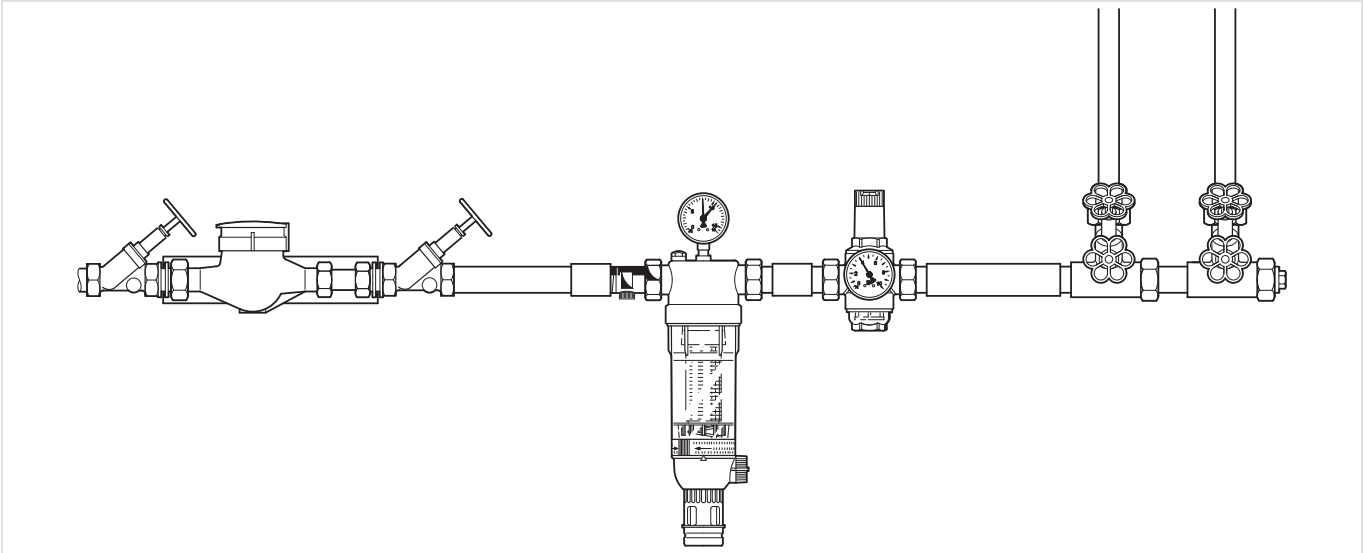

Technical Characteristics

kvs-Values

Nominal size diameter:	DN 15	DN 20	DN 25	DN 32	DN 40	DN 50
k _{VS} -value (m ³ /h):	4.5	10	15	28	41	70

Pressure drop characteristics


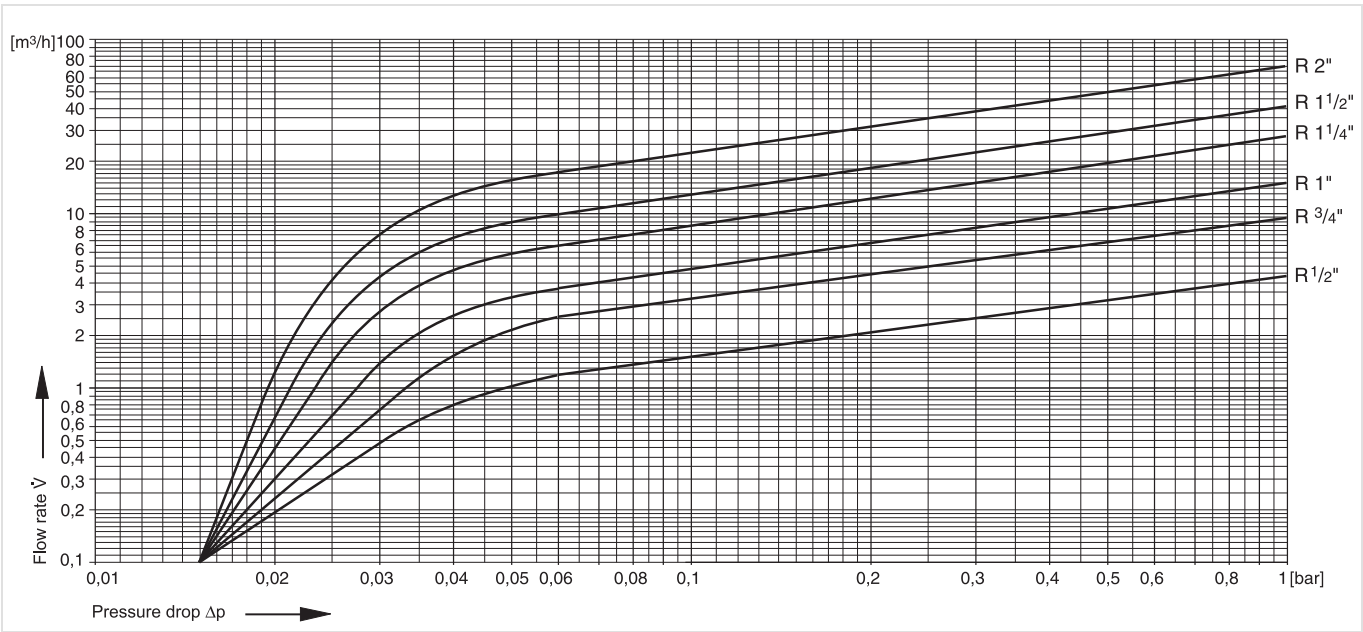


Fig. 1 Pressure drop within the valve in dependency of the flow rate and the used connection size

Dimensions

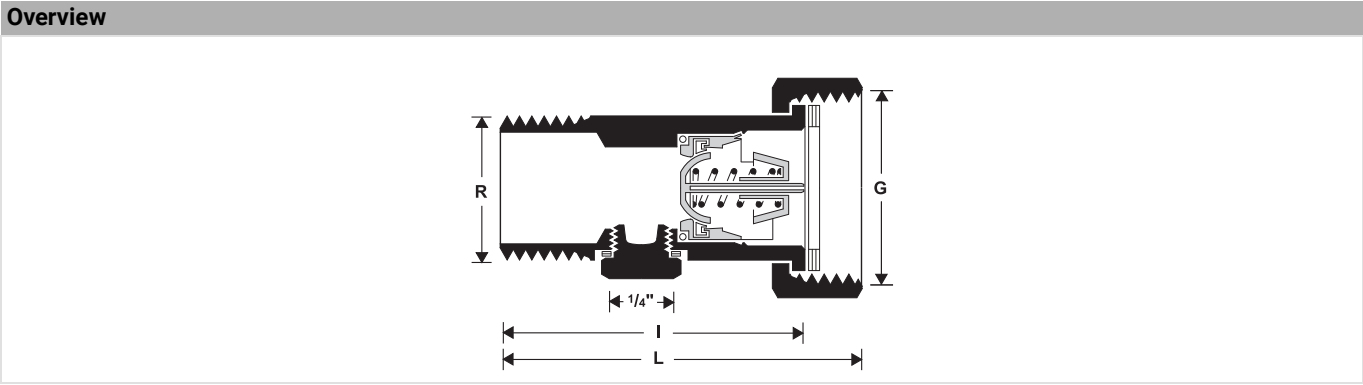

Parameter		Values					
Nominal size diameter:	DN	15	20	25	32	40	50
Connection size:	R	1/2"*	3/4"	1"	1 1/4"	1 1/2"	2"
	G	1"	1"	1 1/4"	1 1/2"	2"	2 1/2"
Test and drain plug:	R	1/4"	1/4"	1/4"	1/4"	1/4"	1/4"
Weight:	kg	0.2	0.22	0.35	0.52	0.86	1.56
Dimensions:	L	69	74	82.5	94	103.5	121
	I	57	63	69.5	80	90	106
Nominal flow rate at Δp = 0.15 bar	m³/h	1.8	3.8	5.8	10.8	15.9	27.1
DIN/DVGW Registration No.:		NW - 6312 AS 2269					

Note: All dimensions in mm unless stated otherwise.
* The RV277-1/2A not suitable for D06F-1/2A

Ordering Information


The following tables contain all the information you need to make an order of an item of your choice.

Options

Nominal size diameter	k _{VS} -value	Item No.
DN 15	4.5	RV277-1/2A
DN 20	10	RV277-3/4A
DN 25	15	RV277-1A
DN 32	28	RV277-1 1/4A
DN 40	41	RV277-1 1/2A
DN 50	70	RV277-2A

Spare Parts

Inlet check valve RV277, from 1994 onwards

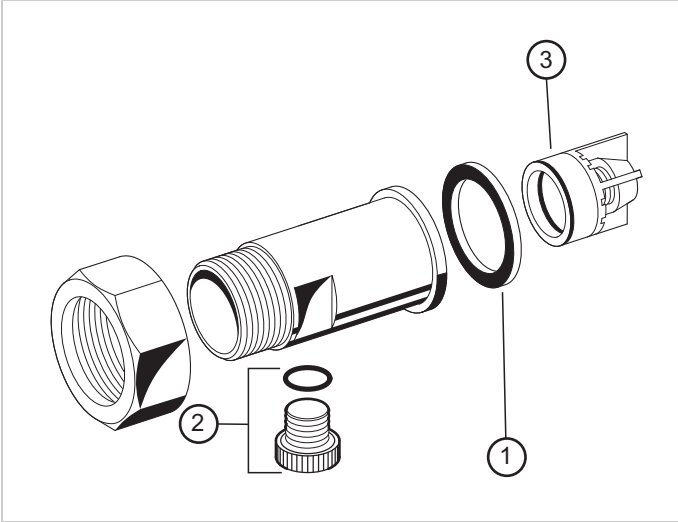Overview	Description	Dimension	Item No.
	1 Union seal washer (10 pcs.)		
		1/2" + 3/4"	0901444
		1"	0901445
		1 1/4"	0901446
		1 1/2"	0901447
		2"	0901448
	2 Blanking plug with O-ring G1/4" (5 pcs.)		
			S06K-1/4
	3 Check valve		
		1/2"	2166200
		3/4"	2110200
		1"	2164400
		1 1/4"	2164500
		1 1/2"	2164600
		2"	2164700

resideo

Ademco 1 GmbH, Hardhofweg 40,
74821 MOSBACH, GERMANY
Phone: +49 6261 810

Manufactured for and on behalf of
Pittway Sàrl, Z.A., La Pièce 6,
1180 Rolle, Switzerland
by its authorised representative
Ademco 1 GmbH

Subject to change. EN0H-1200GE23 R1125
© 2025 Resideo Technologies, Inc.
All rights reserved.

For more information
resideo.com

This document contains proprietary information of Pittway Sàrl and its affiliated companies and is protected by copyright and other international laws. Reproduction or improper use without specific written authorization of Pittway Sàrl is strictly forbidden.